

PRODUCT DATA SHEET

AMBERLITE™ IRC86RF
Industrial Grade Weak Acid Exchanger

AMBERLITE IRC86RF resin is a gel type high capacity weak acid cation exchange resin containing carboxylic acid groups. The principal application of this resin is dealkalization of industrial waters. AMBERLITE IRC86RF resin, in the hydrogen cycle, removes hardness associated with alkalinity. The particle size distribution of AMBERLITE IRC86RF is designed for use in packed bed and floating bed

systems. When used in combination with a strong acid cation exchanger in demineralizer systems, it reduces acid regenerant consumption. Due to its high swelling, it is not recommended to use AMBERLITE IRC86RF in applications where the resin is fully converted from H⁺ to Na⁺ form.

PROPERTIES

Physical form _____	Clear amber spherical beads
Matrix _____	Gel polyacrylic copolymer
Functional group _____	Carboxylic acid
Ionic form as shipped _____	H ⁺
Total exchange capacity ^[1] _____	≥ 4.10 eq/L (H ⁺ form)
Moisture holding capacity ^[1] _____	47 to 53 % (H ⁺ form)
Shipping weight _____	790 g/L
Particle size	
Uniformity coefficient ^[1] _____	≤ 1.5
Harmonic mean size ^[1] _____	0.600 to 0.800 mm
< 0.300 mm ^[1] _____	0.1 % max
Reversible swelling _____	H ⁺ → Na ⁺ ≤ 100 %
(total conversion)	H ⁺ → Ca ⁺⁺ ≤ 15 %
	H ⁺ → Mg ⁺⁺ ≤ 50 %

^[1] Contractual value
 Test methods are available on request.

SUGGESTED OPERATING CONDITIONS

Maximum operating temperature _____	100°C
Minimum bed depth _____	700 mm
Service flow rate _____	5 to 70 BV*/h
Regeneration	
Regenerant _____	HCl H ₂ SO ₄
Level _____	104 to 110 % of operating capacity
Concentration (%) _____	2 to 5 0.5 to 0.7
Minimum contact time _____	30 minutes
Slow rinse _____	2 BV at regeneration flow rate
Fast rinse _____	2 to 4 BV at service flow rate

* 1 BV (Bed Volume) = 1 m³ solution per m³ resin

PERFORMANCE

Operating capacity

The operating capacity of AMBERLITE IRC86RF resin is a function of analysis, temperature and service flow rate of water. Data providing information to calculate the capacity are given in the engineering data sheet (EDS 0235 A).

Regeneration

AMBERLITE IRC86RF resin is readily regenerated with little over stoichiometric amounts of strong acids. If sulfuric acid is used, care must be taken to apply a low concentration of H_2SO_4 (• 0.7 %) in order to avoid calcium sulfate precipitation.



LIMITS OF USE

Due to its high swelling between H^+ and Na^+ or NH_4^+ forms, it is recommended not to use AMBERLITE IRC86RF resin between these ionic

forms. AMBERLITE IRC86RF resin is suitable for industrial uses. For all other specific applications such as pharmaceutical, food processing or potable water applications, it is recommended that all potential users seek advice from Rohm and Haas in order to determine the best resin choice and optimum operating conditions.

HYDRAULIC CHARACTERISTICS

Figure 1 shows the bed expansion of AMBERLITE IRC86RF resin as a function of backwash flow rate and water temperature. Figure 2 shows the pressure drop data for AMBERLITE IRC86RF resin, as a function of service flow rate and water temperature. Pressure drop data are valid at the start of the service run with clear water and a correctly classified bed. The hydraulic curves are for H^+ form resin.

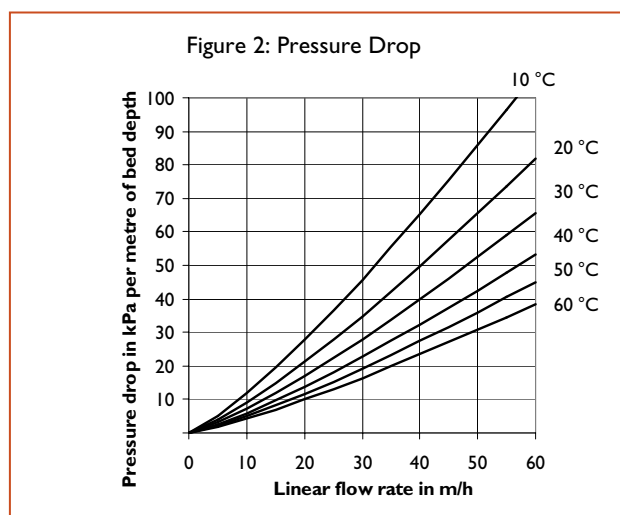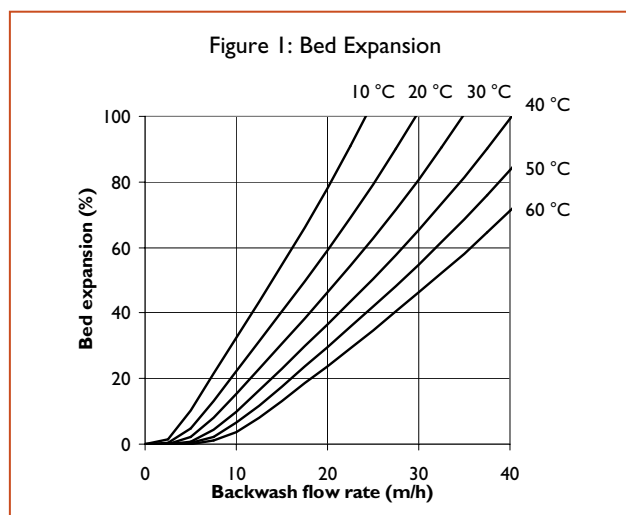

All our products are produced in ISO 9001 certified manufacturing facilities.

Rohm and Haas/Ion Exchange Resins - Philadelphia, PA - Tel. (800) RH AMBER - Fax: (215) 409-4534
Rohm and Haas/Ion Exchange Resins - 75579 Paris Cedex 12 - Tel. (33) 1 40 02 50 00 - Fax : 1 43 45 28 19

<http://www.amberlite.com>

ROHM AND HAAS 

AMBERLITE is a trademark of Rohm and Haas Company and its affiliates, Philadelphia, U.S.A.

Ion exchange resins and polymeric adsorbents, as produced, contain by-products resulting from the manufacturing process. The user must determine the extent to which organic by-products must be removed for any particular use and establish techniques to assure that the appropriate level of purity is achieved for that use. The user must ensure compliance with all prudent safety standards and regulatory requirements governing the application. Except where specifically otherwise stated, Rohm and Haas Company does not recommend its ion exchange resins or polymeric adsorbents, as supplied, as being suitable or appropriately pure for any particular use. Consult your Rohm and Haas technical representative for further information. Acidic and basic regenerant solutions are corrosive and should be handled in a manner that will prevent eye and skin contact. Nitric acid and other strong oxidising agents can cause explosive type reactions when mixed with Ion Exchange resins. Proper design of process equipment to prevent rapid buildup of pressure is necessary if use of an oxidising agent such as nitric acid is contemplated. Before using strong oxidising agents in contact with Ion Exchange Resins, consult sources knowledgeable in the handling of these materials.

Rohm and Haas Company makes no warranties either expressed or implied as to the accuracy or appropriateness of these data and expressly excludes any liability upon Rohm and Haas arising out of its use. We recommend that the prospective users determine for themselves the suitability of Rohm and Haas materials and suggestions for any use prior to their adoption. Suggestions for uses of our products of the inclusion of descriptive material from patents and the citation of specific patents in this publication should not be understood as recommending the use of our products in violation of any patent or as permission or license to use any patents of the Rohm and Haas Company and its affiliates. Material Safety Data Sheets outlining the hazards and handling methods for our products are available on request.